Specifications

SMART kapp

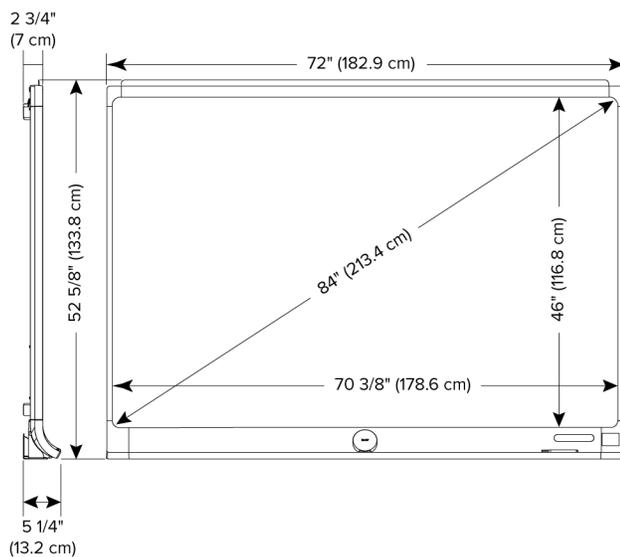SMART kapp™ 84" capture board (kapp84)

Overview

The SMART kapp™ 84" capture board enables you to collaborate with others in a simple but powerful way. Write and draw on the capture board like you would a regular dry erase board. You can then connect a Bluetooth®-enabled mobile device to the capture board by scanning a Quick Response (QR) code or by tapping the Near Field Communication (NFC) tag. When you first connect your mobile device, you're directed to the Apple App Store or Google Play™ to download the SMART kapp app. After you download and install the app, you can use it to connect to your capture board and share content with others.

See smartkapp.com for more information on this product.

Dimensions and weights[1]

Dimensions

2 3/4"
(7 cm)

72" (182.9 cm)

52 5/8" (133.8 cm)

84" (213.4 cm)

46" (116.8 cm)

70 3/8" (178.6 cm)

5 1/4"
(13.2 cm)

Weight

57 lb. (25.9 kg)

Shipping dimensions

xx" × xx" × xx"
(xx cm × xx cm × xx cm)

Shipping weight

xx lb. (xx kg)

---

[1]All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Parts and features

Included parts	SMART kapp 84" capture board Dry erase marker (×4) Eraser Brackets and hardware for mounting the capture board to a wall
Digital capture technology	DViT® (Digital Vision Touch) technology
Wireless technology	Bluetooth 2.1 + EDR[2]
Capture options	Establish a Bluetooth wireless connection with a supported mobile device (see below) by doing one of the following: • Scan the capture board's unique QR code • Tap the capture board's NFC tag (Android™ devices only) Connect a USB drive
USB drive support	USB 2.0 Type-A receptacle Support for FAT-formatted USB drives only

Mobile device support

Apple devices	iOS 7.1 or later operating system software 50 MB storage iPhone 4S or later Third generation iPad or later First generation iPad mini or later Fifth generation iPod touch or later
Android devices	Android 4.1 (Jelly Bean) or later operating system 50 MB of storage (internal or SD card) Devices meeting the following specifications: • 1024 MB of RAM • 720p or better screen resolution • Bluetooth 2.1 + EDR • NFC (recommended) • 3 megapixel or better rear-facing camera (recommended)

[2]Compatible with Bluetooth 3.0 and dual-mode Bluetooth 4.0

Supported browsers

Mobile devices

Android devices	Chrome for Android 39.0.2171.93 or later
Apple devices	Safari for iOS 7.1 or later operating system software

Desktop

- Safari 8.0 or later
- Chrome 39.0.2171.95 or later
- Firefox 34.0.5 or later
- Internet Explorer 10 or later

Mounting

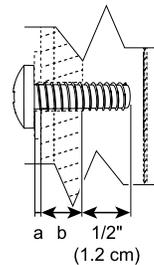|	
Options	- Included mounting bracket - Standard VESA® 600 mm × 800 mm mounting bracket (not included)
Recommended height	69" (175.3 cm) from the floor to the middle of the included mounting bracket

Bolt requirements for VESA mounting bracket

Size	M6
⚠ Maximum length	To avoid damage to the capture board, ensure the bolt is no longer than 1/2" (1.2 cm) plus the width of the washer (a) and the width of the bracket (b)

Power

Power specifications	5V, 3A
Power cable	6' 6 3/4" (2 m) power cable

Storage and operating requirements

Storage

Temperature	-40–140℉ (-40–60℃)
Humidity	5–95% relative humidity, non-condensing

Operating

Temperature	41–95℉ (5–35℃)
Humidity	10–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification	CE, ETL, FCC

Environmental compliance

European Union	REACH, RoHS, WEEE and Packaging
U.S.	Packaging and Conflict Minerals

Purchasing information

Order numbers

xxxxx	SMART kapp 84" capture board (kapp84)

Warranty

North America	90-day limited equipment warranty
UK	One-year limited equipment warranty
Europe	Two-year limited equipment warranty

Extended warranties

EWY1-KAPP84	One-year extended warranty
EWY2-KAPP84	Two-year extended warranty
Replacement parts	Replacement erasers can be purchased from the Store for SMART Parts (see smarttech.com/Support/PartsStore)

---

smartkapp.com